



A COMPLETE PRODUCT RANGE OF LUBRICATION EQUIPMENTS
SOLUTION FOR ALL INDUSTRIAL NEEDS



LUBRICATION EQUIPMENTS

Product Application

Portable Lube System (Container Lube)




AIR OPERATED PISTON PUMP

Grease Pump - Fire Lube 300 - 50 : 1

Designed for manufacturing or automotive service facilities

- 50:1 ratio allows grease to be pumped up to NLGI 02
- Double acting pump provides continuous flow operation
- Rugged inlet cage withstands demanding shop environments
- Full line of stationary and portable package configurations
- High flow capability, stable function

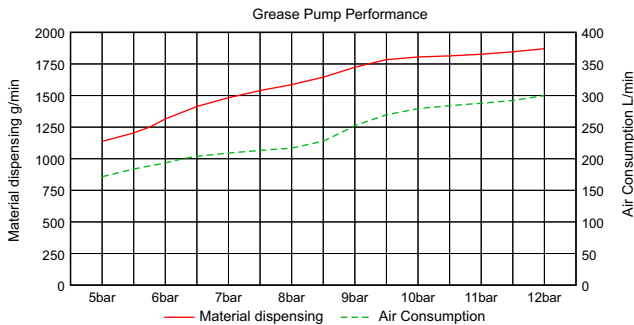

Technical Specification

Part No	821252003
Drum Application	27 kg / 60 lbs
Pressure Ratio	50 : 1
Air Inlet Pressure	5 - 12 bar / 70-175 psi
MAX. Fluid Pressure	600 bar / 8700 psi
Air Motor Effective Diameter	76 mm/ 3"
Air Consumption (min)	@ 8 bar 230 L @115 psi / 8.1 CFM
MAX. Free Flow Rate (min)	1800 g / 4 lbs
Suction Tube Diameter	32 mm / 1 -1/4"
Suction Tube Length	445 mm / 19 "
Air Inlet Connection	1/4" Quick plug 1/4" NPT Female
Grease Inlet Connection	1/4" BSP/ 1/4" NPT Female
Weight	8 kgs / 17 lbs
Packaging Dimension	92 x 25 x 20 cm / 36.2" x 9.8" x 7.8"



Part No	821252005
Drum Application	180 kg / 397 lbs
Pressure Ratio	50 : 1
Air Inlet Pressure	5 - 12 bar / 70-175 psi
MAX. Fluid Pressure	600 bar / 8700 psi
Air Motor Effective Diameter	76 mm/ 3"
Air Consumption (min)	@ 8 bar 230 L @115 psi / 8.1 CFM
MAX. Free Flow Rate (min)	1800 g / 4 lbs
Suction Tube Diameter	32 mm / 1 -1/4"
Suction Tube Length	855 mm / 37"
Air Inlet Connection	1/4" Quick plug 1/4" NPT Female
Grease Inlet Connection	1/4" BSP/ 1/4" NPT Female
Weight	10.5 kgs / 22 lbs
Packaging Dimension	139 x 25 x 20cm / 54.7"x9.8"x7.8"




AIR OPERATED PISTON PUMP

Oil Pump - Fire Lube 300 - 5 : 1

Features & Benefits

- The 5:1 is perfect for fluid oil transfer in high volume and longer distance applications such as truck shop service fleet facilities and in-plant applications
- Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life
- Few moving parts in the air motor assembly means less downtime and low repair cost
- Large air porting design provides efficient use of compressed air supply for continuous pump operation without icing
- Suitable for use of oil to SAE240

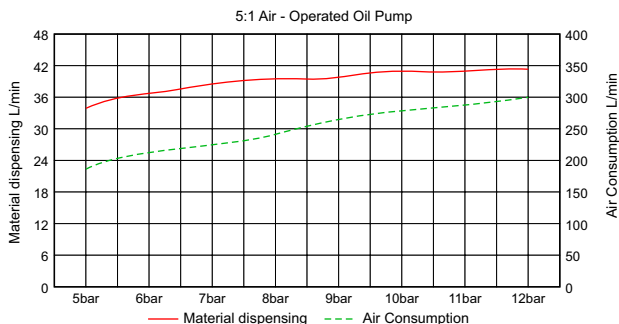

Technical Specification

Part No	822252003
Drum Application	PAIL 20 - 40 L / 5 - 10 Gallon
Pressure Ratio	5 : 1
Air Inlet Pressure	5 - 12 bar / 70-175 psi
MAX. Fluid Pressure	60 bar / 870 psi
Air Motor Effective Diameter	76 mm/ 3"
Air Consumption (min)	@ 8 bar 245 L @115 psi / 8.6 CFM
MAX. Free Flow Rate (min)	40 L / 10.6 Gallon
Suction Tube Diameter	54 mm / 2 - 1/8"
Suction Tube Length	226 mm / 8.9"
Air Inlet Connection	1/4" Quick plug 1/4" NPT Female
Oil Outlet Connection	3/4" Female
Weight	9.7 kgs / 21 lbs
Packaging Dimension	118 x 25 x 20 cm / 46.5" x 9.8" x 7.9"




Part No	822252004
Drum Application	180 - 220 L / 48-58 Gallon
Pressure Ratio	5 : 1
Air Inlet Pressure	5 - 12 bar / 70-175 psi
MAX. Fluid Pressure	60 bar / 870 psi
Air Motor Effective Diameter	76 mm/ 3"
Air Consumption (min)	@ 8 bar 245 L @115 psi / 8.6 CFM
MAX. Free Flow Rate (min)	40 L / 10.6 Gallon
Suction Tube Diameter	54 mm / 2 - 1/8"
Suction Tube Length	859 mm / 33.8"
Air Inlet Connection	1/4" Quick plug 1/4" NPT Female
Oil Outlet Connection	3/4" Female
Weight	10.5 kgs / 23 lbs
Packaging Dimension	139 x 25 x 20 cm / 54.7" x 9.8" x 7.9"



ACCESSORIES OIL & GREASE PUMP

			
MOBILE GREASE LUBE DISPENSING 185KG DRUM C/W GREASE GUN & HOSE REEL 3/8"	MOBILE OIL LUBE DISPENSING 208 LITERS DRUM C/W OIL GUN & HOSE REEL 1/2"	HEAVY DUTY TROLLEY FOR 185 KG & 208 L DRUM C/W HOSE REEL BRACKET	TROLLEY (FOR PAIL 18 - 20 KG)
PN: 821243000	PN: 822273000	PN: 811002013	PN: 811002010

			
DRUM COVER 180 KG	HIGH FLOW OIL CONTROL VALVE 80 L (3/4")	GUN OIL CONTROL VALVE 35 L (1/2")	GREASE COUPLER (NOZZLE 1/8")
PN: 811152302	PN: 18118002-12	PN: 18063531-08	PN: 1785701F-02


			
GREASE GUN 1/4" WITH Z SWIVEL	GREASE GUN CONTROL VALVE 1/4" NPT	Z SWIVEL 1/4"	OVAL GEAR FLOWMETER
PN: 841041410	PN: 18212070-04	PN: 1785702-04	PN: 842040100 (1")
GREASE GUN 3/8" WITH Z SWIVEL	GREASE GUN CONTROL VALVE 3/8" NPT	Z SWIVEL 3/8"	PN: 842040150 (1.5")
PN: 841041400	PN: 18212030-06	PN: 18970041-06	PN: 842040200 (2")

DUAL PEDESTAL - Spring Retractable Reels

REEL MASTER 3/8 Inch I.D.

Heavy Duty

Grease, Air & Oil Hose Reel

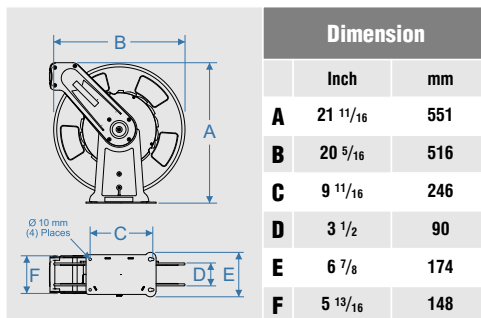

FEATURES


- Dual pedestal base and guide arm design are structurally reinforced.
- Five-in-one, heat-treated aluminium casting incorporates main shaft, ratchet, spring arbor and inlet/outlet plumbing in one-piece casting.
- Containerized spring assembly provides safer and easier handling during maintenance.
- Two sealed ball bearings for smooth rotation of main shaft.

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		BSP (M) Reel Inlet	JIC (M) Hose Outlet	Model without Hose & Bumper	Shipping Weight	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg
Medium Pressure Oil Reels Maximum temperature 210°F (99°C)															
841030000	46	21	1/4	6.3	37/64	14.7	50	15	5000	345	3/8	3/8	841030110	26	12
841030100	57	26	3/8	9.5	3/4	19	50	15	5000	345	3/8	3/8			

REEL MASTER 1/2 Inch I.D.

Heavy Duty

Grease, Air & Oil Hose Reel

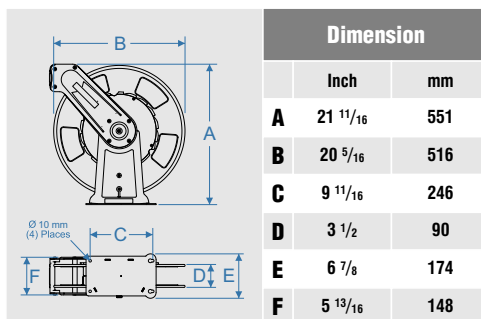

FEATURES

- Dual pedestal base and guide arm design are structurally reinforced.
- Five-in-one, heat-treated aluminium casting incorporates main shaft, ratchet, spring arbor and inlet/outlet plumbing in one-piece casting.
- Containerized spring assembly provides safer and easier handling during maintenance.
- Two sealed ball bearings for smooth rotation of main shaft.


Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		BSP (M) Reel Inlet	JIC (M) Hose Outlet	Model without Hose & Bumper	Shipping Weight	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg
Medium Pressure Oil Reels Maximum temperature 210°F (99°C)															
842030200	64	29	1/2	12.7	55/64	22	50	15	3000	207	1/2	1/2	842030210	26	12

DUAL PEDESTAL - Spring Retractable Reels

REEL MASTER 3/4 Inch I.D.

Heavy Duty

Fuel & Oil Hose Reel

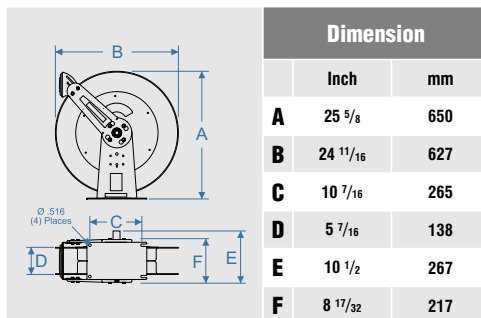

FEATURES


- Dual pedestal base and guide arm design are structurally reinforced.
- Five-in-one, heat-treated aluminium casting incorporates main shaft, ratchet, spring arbor and inlet/outlet plumbing in one-piece casting.
- Containerized spring assembly provides safer and easier handling during maintenance.
- Two sealed ball bearings for smooth rotation of main shaft.

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		NPT (F) Reel Inlet	NPT (F) Hose Outlet	Model without Hose & Bumper	Shipping Weight	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg
Medium Pressure Oil Reels Maximum temperature 210°F (99°C)															
842030300	98	44	3/4	19	1-3/16	30	50	15	1500	103	3/4	3/4	842030310	84	38

REEL MASTER 1 Inch I.D.

Heavy Duty

Fuel & Oil Hose Reel

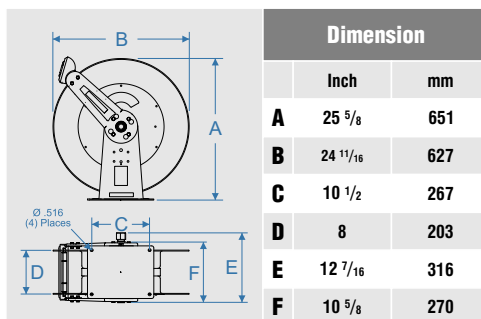

FEATURES

- Dual pedestal base and guide arm design are structurally reinforced.
- Five-in-one, heat-treated aluminium casting incorporates main shaft, ratchet, spring arbor and inlet/outlet plumbing in one-piece casting.
- Containerized spring assembly provides safer and easier handling during maintenance.
- Two sealed ball bearings for smooth rotation of main shaft.


Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		NPT (F) Reel Inlet	NPT (F) Hose Outlet	Model without Hose & Bumper	Shipping Weight	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg
Low Pressure Fuel Reels Maximum temperature 150°F (65°C) w/hose / 210°F (99°C) w/o hose															
842030400	115	52	1	25	1-1/2	38	50	15	500	35	1	1	842030410	84	38

LARGE DELIVERY - Spring Retractable Reels

REEL MASTER 3/4 Inch I.D.

Ultimate Duty

Fuel & Oil Hose Reel

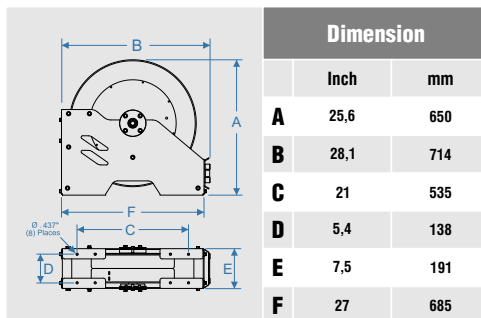

FEATURES


- Substantial Base Frame
- Full width frame has the greatest amount of mounting area and overall strength of reels within its class.
- Full Flow Stress Free Swivel Design The full flow swivel combines the highest grade seal design and materials with bearing areas
- to ensure maximum service life.

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		NPT (F) Reel Inlet	NPT (F) Hose Outlet	Model without Hose & Bumper	Shipping Weight	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg
Low Pressure Reels															
Maximum temperature 210°F (99°C)															
842031300	130	59	3/4	19	1-3/16	30	50	15	1500	103	3/4	3/4	842031310	118	53.5

REEL MASTER 1 Inch I.D.

Ultimate Duty

Fuel & Oil Hose Reel

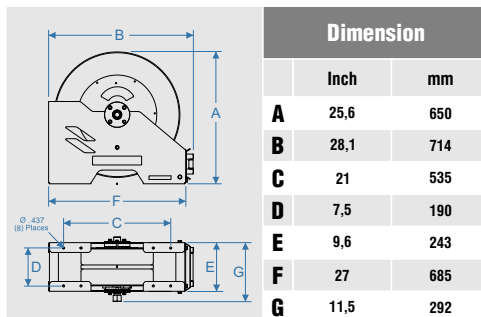



FEATURES

- Substantial Base Frame
- Full width frame has the greatest amount of mounting area and overall strength of reels within its class.
- Full Flow Stress Free Swivel Design The full flow swivel combines the highest grade seal design and materials with bearing areas
- to ensure maximum service life.

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		NPT (F) Reel Inlet	NPT (F) Hose Outlet	Model without Hose & Bumper	Shipping Weight	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg
Low Pressure Reels															
Maximum temperature 210°F (99°C)															
842031400	141	64	1	25	1-1/2	38	50	15	500	35	1	1	842031410	110	50

LARGE DELIVERY - Spring Retractable Reels

REEL MASTER 1,5 Inch I.D. Ultimate Duty Fuel, Oil & Water Hose Reel

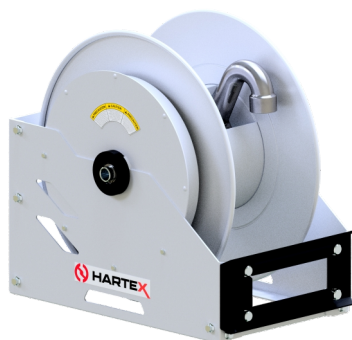

Dimension		
	Inch	mm
A	26 5/8	676
B	26 1/8	664
C	22 1/8	563
D	13 3/8	341
E	17 5/8	452
F	24 1/4	616
G	22	561

FEATURES

- Substantial Base Frame
- Full width frame has the greatest amount of mounting area and overall strength of reels within its class.
- Full Flow Stress Free Swivel Design The full flow swivel combines the highest grade seal design and materials with bearing areas
- to ensure maximum service life.

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		NPT (F) Reel Inlet	NPT (F) Hose Outlet	Model without Hose & Bumper	Shipping Weight	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		lbs	kg
Low Pressure Reels															
Maximum temperature 210°F (99°C)															
842030500	185	84	1-1/2	38	2	51	50	15	600	41	1-1/2	1-1/2	842030510	135	61

DIAPHRAGM PUMP

Flow
rate

First, Make Sure the pump size
according to the flow rate request

Wet side
material

Second, select appropriate wet
side component according to
material chemical characteristic.



PUMP DATA

IMAGE					
PUMP SIZE	1/2"	1"	1 1/2"	2"	3"
Working Air Pressure (bar)	1.5 - 6.9	1.0 - 8.3	1.0 - 8.4	1.0 - 8.5	1.0 - 8.6
Port Size	1/2"	1"	1.5"	2"	3"
Max. Flow Rate (L/min)	43.5	192	378.5	667	903
Displacement Per Cycle (L)	0.14	0.87	2.83	3.78	7.67
Max. Head of Delivery (m)	70	60	80	80	80
Max. Dry Suction (m)	4.1	6.7	6.7	6.2	5.3
Max. Particle Size	2.5	3	6	7	9

DIAPHRAGM PUMP 1/2"


81226 - XXXX - XX

Product	Size	Body Material	Ball Material	Diaphragm Material
Hartex Air Operated Double Diaphragm Pump	15 - 1/2" 25 - 1" 40 - 1 1/2" 50 - 2" 80 - 3"	AL - Aluminum PP - Polypropylene SS - Stainless Steel CS - Carbon Steel	H - HYTREL T - PTFE	H - HYTREL T - PTFE

PUMP DATA

Working Air Pressure	0.15 - 0.69 Mpa
Max. Outlet Pressure	0.69 Mpa
Max. Flow Rate	45.3 Lpm
Max. Particle Size	2.5 mm
Max. Dry Suction	41 m
Noise Level @70 psi	75 dB
Weight	Plastic: 2.4 kg SS: 5.5 kg CS: 5.5 kg

PERFORMANCE CURVE

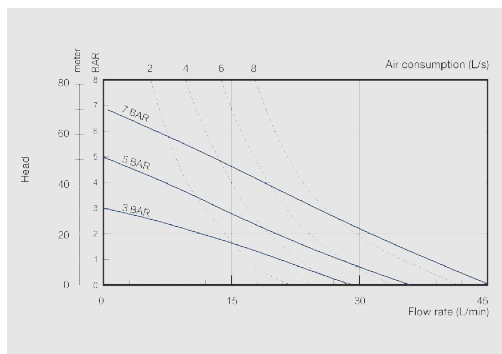


PORT SIZE


A	B	C	D	E	F
Air Inlet	Exhaust	Inlet	Outlet	Inlet	Outlet
1/4" NPT	3/8" NPT	1/2-14 BSP Rp	1/2-14 BSP Rp	1/2" NPT	1/2" NPT




Plastic pump




Stainless steel pump



Carbon steel pump



Aluminum alloy pump



DIAPHRAGM PUMP 1"


81226 - XXXX - XX

Product	Size	Body Material	Ball Material	Diaphragm Material
Hartex Air Operated Double Diaphragm Pump	15 - 1/2" 25 - 1" 40 - 1 1/2" 50 - 2" 80 - 3"	AL - Aluminum PP - Polypropylene SS - Stainless Steel CS - Carbon Steel	H - HYTREL T - PTFE	H - HYTREL T - PTFE

PUMP DATA


Working Air Pressure	0.10 - 0.83 Mpa
Max. Outlet Pressure	0.83 Mpa
Max. Flow Rate	192 Lpm
Max. Particle Size	3 mm
Max. Dry Suction	6.7 m
Noise Level @70 psi	75 dB
Weight	Plastic: 9.5 kg SS/CS: 5.5 kg AL: 9.5 kg

PERFORMANCE CURVE

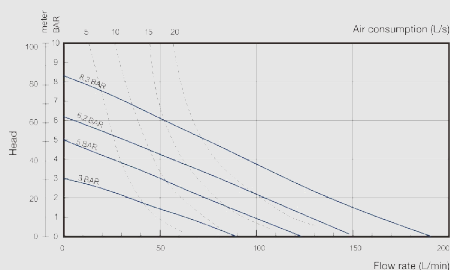


PORT SIZE


A	B	C	D	E	F
Air Inlet	Exhaust	Inlet	Outlet	Inlet	Outlet
1/4" NPT	3/8" NPT	1" BSP	1" BSP	1" Flange	1" Flange




Plastic pump



Stainless steel pump



Carbon steel pump



Aluminum alloy pump

DIAPHRAGM PUMP 1-1/2"


81226 - XXXX - XX

Product	Size	Body Material	Ball Material	Diaphragm Material
Hartex Air Operated Double Diaphragm Pump	15 - 1/2" 25 - 1" 40 - 1 1/2" 50 - 2" 80 - 3"	AL - Aluminum PP - Polypropylene SS - Stainless Steel CS - Carbon Steel	H - HYTREL T - PTFE	H - HYTREL T - PTFE

PUMP DATA

Working Air Pressure	0.10 - 0.83 Mpa
Max. Outlet Pressure	0.83 Mpa
Max. Flow Rate	378.5 Lpm
Max. Particle Size	6 mm
Max. Dry Suction	6.7 m
Noise Level @70 psi	75 dB
Weight	Plastic: 19 kg SS/CS: 30 kg AL: 18 kg

PERFORMANCE CURVE

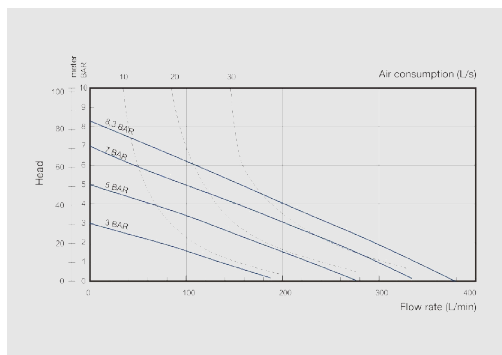


PORT SIZE


A	B	C	D	E	F
Air Inlet	Exhaust	Inlet	Outlet	Inlet	Outlet
1/2" NPT	3/4" NPT	1 1/2" BSP	1 1/2" BSP	1 1/2" Flange	1 1/2" Flange




Plastic pump




Stainless steel pump



Carbon steel pump



Aluminum alloy pump



DIAPHRAGM PUMP 2"


81226 - XXXX - XX

Product	Size	Body Material	Ball Material	Diaphragm Material
Hartex Air Operated Double Diaphragm Pump	15 - 1/2" 25 - 1" 40 - 1 1/2" 50 - 2" 80 - 3"	AL - Aluminum PP - Polypropylene SS - Stainless Steel CS - Carbon Steel	H - HYTREL T - PTFE	H - HYTREL T - PTFE

PUMP DATA


Working Air Pressure	0.10 - 0.83 Mpa
Max. Outlet Pressure	0.83 Mpa
Max. Flow Rate	667 Lpm
Max. Particle Size	7 mm
Max. Dry Suction	6.2 m
Noise Level @70 psi	75 dB
Weight	Plastic: 26 kg SS: 53 kg CS: 48.5 kg AL: 24.5 kg

PERFORMANCE CURVE

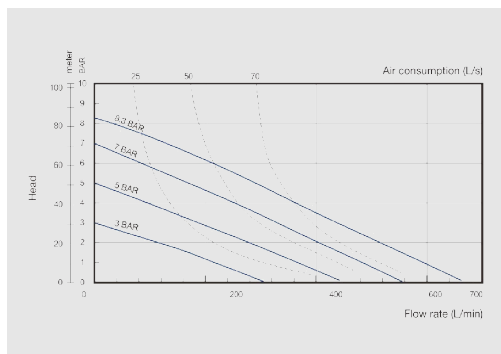


PORT SIZE


A	B	C	D	E	F
Air Inlet	Exhaust	Inlet	Outlet	Inlet	Outlet
3/4" NPT	3/4" NPT	2" BSP	2" BSP	2" Flange	2" Flange




Plastic pump



Stainless steel pump



Carbon steel pump



Aluminum alloy pump

DIAPHRAGM PUMP 3"


81226 - XXXX - XX

Product	Size	Body Material	Ball Material	Diaphragm Material
Hartex Air Operated Double Diaphragm Pump	15 - 1/2" 25 - 1" 40 - 1 1/2" 50 - 2" 80 - 3"	AL - Aluminum PP - Polypropylene SS - Stainless Steel CS - Carbon Steel	H - HYTREL T - PTFE	H - HYTREL T - PTFE

PUMP DATA

Working Air Pressure	0.10 - 0.83 Mpa
Max. Outlet Pressure	0.83 Mpa
Max. Flow Rate	903 Lpm
Max. Particle Size	9 mm
Max. Dry Suction	5.3 m
Noise Level @70 psi	75 dB
Weight	Plastic: 95 kg SS: 91 kg CS: 42 kg

PERFORMANCE CURVE


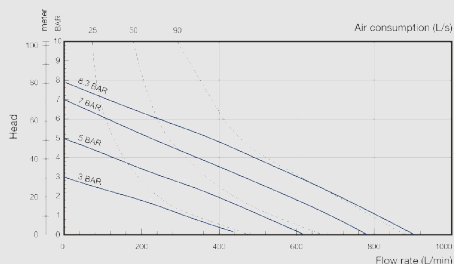


PORT SIZE


A	B	C	D	E	F
Air Inlet	Exhaust	Inlet	Outlet	Inlet	Outlet
3/4" NPT	3/4" NPT	3" BSP	3" BSP	3" Flange	3" Flange




Stainless steel pump



Carbon steel pump



Aluminum alloy pump



DIAPHRAGM PUMP

DIAPHRAGM SELECTION	+ = Excellent ✓ = Good ! = Fair × = Poor
---------------------	--

Diaphragm Material	Lifespan	Wear Resistant	Chemical Compatibility	Thermal Endurance	Temperature (minimum)	Temperature (maximum)
PTFE	+	+	+	+	40°F / 4.4°C	220°F / 104°C
Hytrel®	+	+	✓	✓	32°F/ 0°C	175°F / 79.4°C

WET COMPONENT SELECTION	+ = Excellent ✓ = Good ! = Fair × = Poor
-------------------------	--

Wet Side Part	Material	Chemical Corrosion Resistant				Abrasion Resistance		Thermal Endurance	Adhere Resistant
		Non	Slight	Middle	Serious	Slight	Serious		
HOUSING	AL	+	×	×	×	✓	×	+	
	SS	+	+	✓	✓	+	+	+	
	Cl	+	×	×	×	+	+	+	
	PP	+	+	✓	✓	✓	×	✓	
SEAT	AL	+	×	×	×	✓	×	+	
	SS	+	+	✓	✓	+	+	+	
	Cl	+	×	×	×	+	+	+	
	PP	+	+	✓	✓	✓	×	✓	
	Hytrel®	+	+	✓	!	+	✓	✓	
BALL	SS	+	+	+	✓	✓	+	+	+
	Hytrel®	+	+	✓	!	+	✓	✓	!
	PTFE	+	+	+	+	+	✓	✓	+
VALVE SEALING	PTFE	+	+	+	+	+	✓	✓	+

DIAPHRAGM PUMP


ORDERING INFORMATION

PART NUMBER	DESCRIPTION	REMARKS
81226-15AL-TH	AIR DIAPHRAGM PUMP 1/2" (PP/PTFE,HYTREL)	COOLANT
812260201	REPAIR KIT AIR SET 1/2"	
81226-25AL-HH	AIR DIAPHRAGM PUMP 1" (AL/HYTREL/HYTREL)	OIL & FUEL
81226-25AL-TT	AIR DIAPHRAGM PUMP 1" (AL/PTFE/PTFE)	
812260203	REPAIR KIT AIR SET 1"	
812260223	REPAIR KIT FLUID SECTION ADD 1 INCH (BALLS PTFE, DIAPHRAGMS HYTREL)	
812260233	REPAIR KIT FLUID SECTION ADD 1 INCH (BALLS PTFE, DIAPHRAGMS PTFE)	
81226-40AL-TH	AIR DIAPHRAGM PUMP 1.1/2" (AL/PTFE/HYTREL)	
81226-40AL-TT	AIR DIAPHRAGM PUMP 1.1/2" (AL/PTFE/PTFE)	
812260204	REPAIR KIT AIR SET 1.1/2"	
812260224	REPAIR KIT FLUID SECTION ADD 1.1/2 INCH (BALLS PTFE, DIAPHRAGMS HYTREL)	
81226-50AL-TH	AIR DIAPHRAGM PUMP 2" (AL/PTFE/HYTREL)	
81226-50AL-TT	AIR DIAPHRAGM PUMP 2" (AL/PTFE/PTFE)	
812260205	REPAIR KIT AIR SET 2"	
812260225	REPAIR KIT FLUID SECTION ADD 2 INCH (BALLS PTFE, DIAPHRAGMS HYTREL)	
812260235	REPAIR KIT FLUID SECTION ADD 2 INCH (BALLS PTFE, DIAPHRAGMS PTFE)	
81226-80AL-TH	AIR DIAPHRAGM PUMP 3" (AL/PTFE/HYTREL)	
81226-80AL-TT	AIR DIAPH PUMP 3" (AL/PTFE/PTFE)	
812260206	REPAIR KIT AIR SET 3"	

Air Filter Combination (F.R.L. Combination)



JAC4000

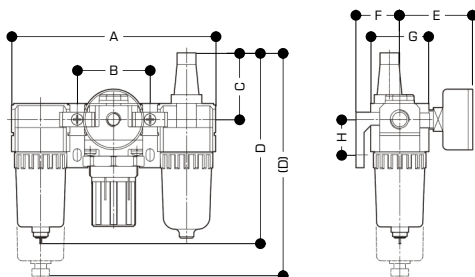

ORDERING INFORMATION		DIMENSION									
PART NUMBER	DESCRIPTIONS	Model	Bore	A	B	C	D	E	F	G	H
JAC3000-02NPT-04	Air Filter Combination FRL 1/4"	JAC3000-02	1/4	181	64	38	156.5	60.8	41	53	35
JAC4000-03NPT-06	Air Filter Combination FRL 3/8"	JAC4000-03	3/8	238	84	41	191.5	65.5	50	70	40
JAC4000-04NPT-08	Air Filter Combination FRL 1/2"	JAC4000-04	1/2	238	84	41	191.5	65.5	50	70	40
JAC4000-06NPT-12	Air Filter Combination FRL 3/4"	JAC4000-06	3/4	253	89	41	193	69.5	50	70	40
JAC5000-10NPT-16	Air Filter Combination FRL 1"	JAC5000-10	1	300	105	48	271.5	75.5	69.8	90	50

SPECIFICATION					
MODEL	JAC3000-02	JAC4000-03	JAC4000-04	JAC4000-06	JAC5000-10
Rated Flow	2000	4000	4000	4500	5000
Port Size	1/4	3/8	1/2	3/4	1
Filter Precision	25 µm				
Max Adjustable Pressure	1.0 MPa				
Proof Pressure Resistance	1.5 MPa				
Operating Temperature Range	5 ~ 60 C				
Range Of Adjustable Pressure	0.05 ~ 0.85 MPa				
Recommended Lubricant	ISO VG 32				
Container Material	Poly Carbonate				
Protective Cup Cover	Iron				
Drain Function	Differential Drain, Automatic Drain				
Valve Type	With Overflow				



Air Filter Combination (F.R.L. Combination)



JAC3010-N



JAC4010



ORDERING INFORMATION		DIMENSION									
PART NUMBER	DESCRIPTIONS	Model	Bore	A	B	C	D	E	F	G	H
JAC3010-02NPT-04	Air Filter Combination FRL 1/4"	JAC3010-02	1/4	211	92.5	58.5	117	60.8	41	53	35
JAC4010-03NPT-06	Air Filter Combination FRL 3/8"	JAC3010-03	3/8	211	92.5	58.5	117	60.8	41	53	35
JAC4010-04NPT-08	Air Filter Combination FRL 1/2"	JAC4010-04	1/2	262	112	77	154	70.5	50	70	40
JAC4010-06NPT-12	Air Filter Combination FRL 3/4"	JAC4010-06	3/4	267	114	82	164	70.5	50	70	40
JAC5010-10NPT-16	Air Filter Combination FRL 1"	JAC5010-10	1	338	116	97.5	195	75.5	69	90	50

SPECIFICATION					
MODEL	JAC3010-02	JAC3010-03	JAC4010-04	JAC4010-06	JAC5010-10
Rated Flow	1700	1700	3000	3000	4000
Port Size	1/4	3/8	1/2	3/4	1
Filter Precision	25 µm				
Max Adjustable Pressure	1.0 MPa				
Proof Pressure Resistance	1.5 MPa				
Operating Temperature Range	5 ~ 60 C				
Range Of Adjustable Pressure	0.05 ~ 0.85 MPa				
Recommended Lubricant	ISO VG 32				
Container Material	Poly Carbonate				
Protective Cup Cover	Iron				
Drain Function	Semi-automatic Drain, Automatic Drain				
Valve Type	With Overflow				



Distributor :

HARTEX GLOBAL INDUSTRIAL

Factory :

Green Sedayu Bizpark Cakung Blok GS 5 No. 102
Jl. Cakung Cilincing Timur Raya KM. 2
Cakung - Jakarta Timur - 13910

☎ : +62 21 461 3110 | 📞 : +62 811 803 6799
Email: info@hartex.id | Web: www.hartex.id